




BS Series Pivot Type Semi-Automatic - BS-400SA / 450SA

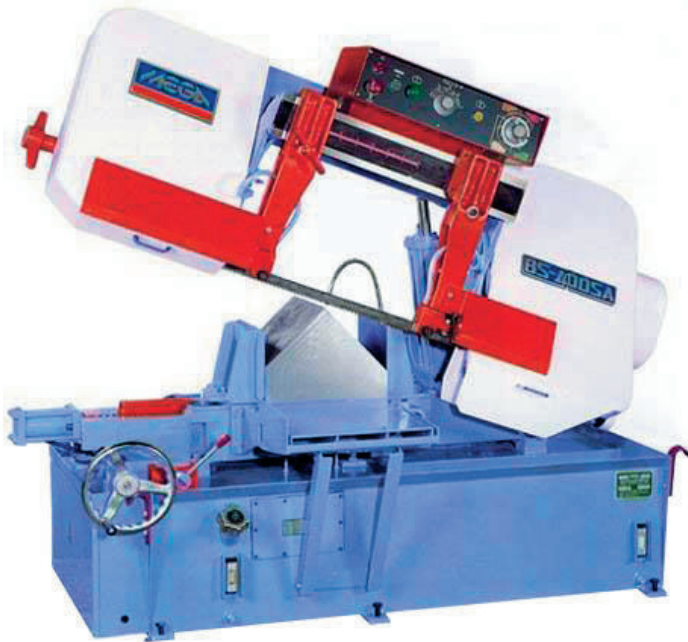

<TD > ● 320 ( at 45°) optional<TD > 1.61 x 0.051 x 184<TD > 25,32,42,55,70,80  
 Variable Speed 20 - 80  
 ( OPT. )<TD > BLADE 7.5;  
 HYD. 2;  
 COOLANT 1/8<TD >1500 / 1750

**Standard Features**

1. Carbide and roller blade guides
2. Automatic head elevation control
3. Power-driven blade cleaning brush
4. Hydraulic quick-setting vise
5. Coolant cleaning flush hose
6. Unique floating roller feed mechanism.
7. Quick-adjusting carbide saw guide (450 & 1830) .
8. Pressure compensation feed-rate control.

**Standard Accessories**

	1. Tool with tool box	1 set
2. 5ft(1.5M) long roller table		1 set
3. Cut-off bar end stopper		1 set
4. Band-Cleaning wire brush		2 pcs
5. Band saw blade		1 pc
6. Instruction manual		1 copy

**Optional Accessories**

1. Automatic chip conveyor.
2. Variable blade speed drive.
3. Mitre cutting device.
4. Hydraulic blade tension.
5. Additional spare roller table.

<TD > ● 460 ■ 460W x 407H

SPECIFICATIONS / MODLE	BS - 400 SA	BS - 450 SA
Cutting Capacity	mm ● 400 ■ 400W x 310H	
in	● 16 ■ 16W x 12H	● 18 ■ 18W x 16H
Mitre Cutting	mm	● 280 ( at 45°) optional
Blade Size	mm	34x1.1x4115 41 x1.30x4670
	in	1.33 x 0.042 x162
	M/min	25,32,42,55,70,80
Blade Speed		Variable Speed 20 - 80 ( OPT. )
	F/min	82,105,138,180,230,260 82,105,138,180,230,260
		Variable Speed 65 - 260 Variable Speed 65 - 260 ( OPT. ) ( OPT. )

Motor Output	HP	BLADE 5; HYD. 1; COOLANT 1/8	
	KW	BLADE 3.75; HYD. 0.75; COOLANT 0.1	BLADE 5.6; HYD. 1.492; COOLANT 0.1
Shipping Volume	mm	2240x1190x1720	2450x1270x1890
	ft	7.3x3.9x5.6	8 x 4.1 x 6.2
Weight Net / Gross	kg	1060 / 1275	
	lb	2330 / 2805	3300 / 3850

<TD >1650 / 1910<TD > 3630 / 4205

SPECIFICATIONS / MODLE		BS - 1830
Cutting Capacity	mm	● 460 ■ 460W x 760H
	in	● 18 ■ 18W x 30H
Mitre Cutting	mm	● 460 ( at 45° ) ( OPT. )
Blade Size	mm	41 x 1.30x5300
	in	1.61 x 0.051 x 209
Blade Speed	M/min	25,32,42,55,70,80 Variable Speed 20 - 80 ( OPT. )
	F/min	82,105,138,180,230,260 Variable Speed 65 - 260 ( OPT. )
Motor Output	HP	BLADE 7.5;HYD. 2;COOLANT 1/8
	KW	BLADE 5.6;HYD. 1.5;COOLANT 0.1
Shipping Volume	mm	2790x1300x1830
	ft	9.1x4.2x6
Weight Net / Gross	kg	
	lb	